





Vibrator for Bottom Wall

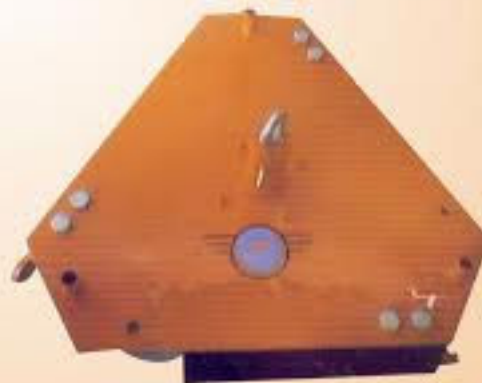

Bottom Vibrator Unit ramming plate is equipped with one pneumatic vibrator. Dry refractory is rammed in about 40 min. in one operation, achieving perfect compaction and absolutely even and leveled bottom. Ideal for Induction furnace.

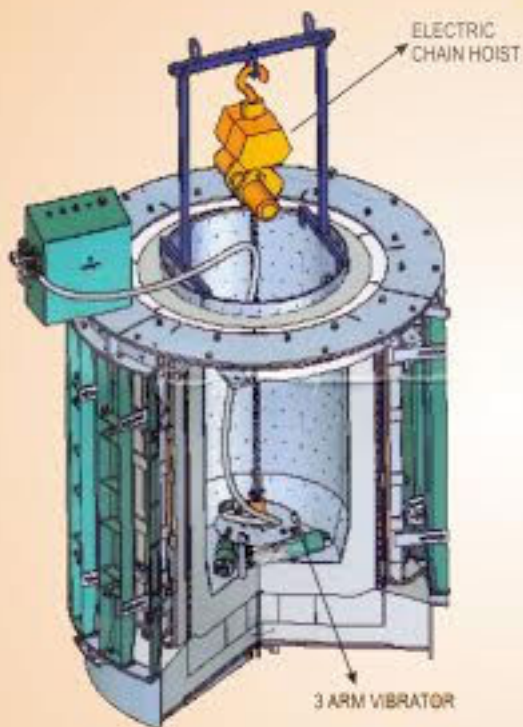

www.anujtherm.com

Super Efficient refractory solution due to Lining Vibrator

- Save 80% Man Power
- Longer Lining Life
- Increase production rate
- Payback period <1 year
- Easy Operation
- Short lining time
- Compact Lining
- Uniform Lining
- Avoid cracks and gas pockets



Vibrator for Side Wall

The Vibrator use the tapping effect and have arms each provided with an adjustable vibrating unit depending on the furnace size. Different tools are available (2 Arms & 3 Arms Lining Tools)

The tools are driven by compressed air and suitable for connection to any compressed air line for at least 6 bars.

Capacity : -

500 kg	-3 Ton	- 2 Arm Vibrator
4 Ton	- 6 ton	- 3 Arm Vibrator
6 Ton	- 12 Ton	- 3 Arm Vibrator
15 Ton	- 25 Ton	- 3 Arm Vibrator
28 Ton	- 40 Ton	- 5 Arm Vibrator



Anujtherm
innovative induction solutions

E1 / 72, Basement, YMCA Road, Sector 11, Faridabad - 121005, Ph. 0129-4013208
Mob. : 9811013208 | e-mail : anujtherm@gmail.com | www.anujtherm.com

Induction Furnace | Induction Heater | Lining Vibrator | Spares